


Independent Testing of Link-to-Link Uniformity*

Transceiver Link Testing shows that when 4 different **Delaire 802.3ae Test Links** are compared, the *variation in BER vs Input Power is $\ll 1\text{dB}$* . This is an indication of the *consistency between different fiber test links* and that these systems are suitable for deployment in applications such as manufacturing test as well as vendor qualification and product development.

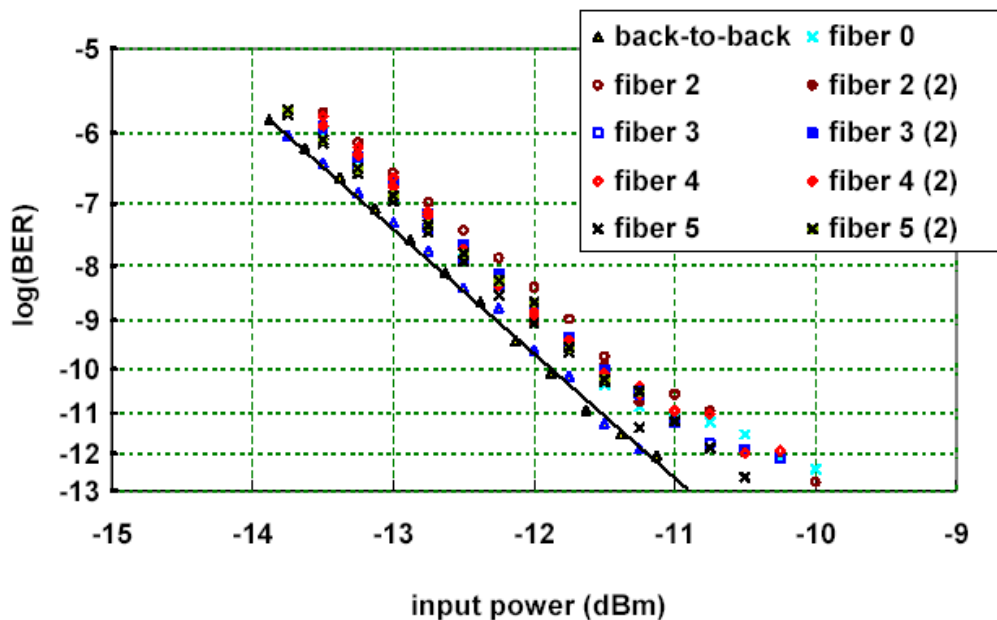

In the above plot, fibers 2–5 are links for the 50 μm multimode 200 m, 2000 MHz-km EMB links from the IEEE 802.3ae standard.

* An independent company performing qualification testing of the Delaire 802.3ae Test Links supplied these test results to Delaire USA.